arXiv:cond-mat/9707220v1 [cond-mat.supr-con] 21 Jul 1997

Josephson Current through Charge Density Waves

M. I. Visscher and B. Rejaei
Theoretical Physics Group, Department of Applied Physics/DIMES
Delft University of Technology, Lorentzweg 1, 2628 CJ Delft, The Netherlands
(February 1, 2008)

The effect of the collective charge density wave (CDW) motion on the Josephson current in a superconductor/charge density wave/superconductor junction is studied theoretically. By deriving the kinetic equations for the coupled superconductor-CDW system, it is shown that below the critical current the CDW does not move. Biased above this value, the Josephson current oscillates as a function of the velocity of the sliding CDW and the collective mode acts as a non-linear shunting resistor parallel to the Josephson channel. The effects of impurity pinning are accounted for at a phenomenological level

PACS numbers: 74.50, 72.15.N

The Josephson effect [1] is known to exist in superconductor hybrid structures, where two superconductors are separated by insulating barriers or normal metals [2]. Recently, the theory of the Josephson effect through systems which support a non-Fermi (Tomonaga-Luttinger) liquid ground state has received much attention due to rapid developments in fabrication technology [3]. In this Letter we investigate the Josephson current through a different yet related system, namely a strongly anisotropic metal with a charge density wave (CDW) instability. Throughout this paper our attention will be restricted to incommensurate CDW's. Despite the insulating quasi-particle spectrum, incommensurate CDW's allow for a unique collective mode of transport, which distinguishes them from ordinary insulators [4]. The sliding motion of the CDW carries electrical current and is dissipationless in the absence of damping sources. It is therefore interesting to investigate whether the Josephson current in a superconductor/charge density wave/superconductor (S/C/S) junction will be affected by the sliding motion. Recent progress in controlled deposition of thin films of CDW's may lead to the fabrication of such mesoscopic-scale heterostructures in the near future [5].

Our model is a current biased S/C/S junction, which consists of parallel one-dimensional CDW chains of length L, sandwiched between two large superconductors with phases φ_R and φ_L (Fig. 1). The CDW is characterized by a complex order parameter $|\Delta_c|e^{i\chi}$, where $|\Delta_c|$ is proportional to the amplitude of the density modulation and the phase χ determines its position. The CDW can slide along the chains with velocity proportional to $\dot{\chi} \equiv \partial_t \chi$.

Using the Keldysh formalism for superconductors [6] and CDW's [7] we have formulated a consistent framework for the quasi-classical dynamics of the coupled superconductor-CDW system. It is shown that the CDW is immobile under a certain critical current. Biased above this value, the CDW starts to slide and the collective transport mode causes a shunting resistance parallel to the Josephson channel. We show that, in the quasi-stationary approximation, the Josephson current has an oscillatory behavior as a function of the phase $\theta = \varphi_R - \varphi_L + \dot{\chi} L/v_F$, where v_F is the Fermi velocity. Apparantly CDW motion induces a dynamical phase which is added to the conventional superconductor phase difference. Finally, we discuss the effects of impurity pinning at a phenomenological level.

The dynamics of superconductor and CDW systems can be described simultaneously by the semiclassical Green functions $g^i_{\alpha\beta}(x;t,t')$ where $i = \{R, A, K\}$ and $\alpha, \beta = \{1,2,3,4\}$. The retarded $\mathbf{g}^R$ and advanced functions $\mathbf{g}^A$ determine the excitation spectrum and the Keldysh function $\mathbf{g}^K$ describes the kinetics of the system. The subscripts $1,3$ refer to right and left moving electrons with spin up and $2,4$ to left and right moving holes with spin down. Throughout this paper "hat" denotes (2x2) matrices and bold-face (4x4) matrices. The Green functions satisfy the equation of motion

$$i\hbar v_F \partial_x \mathbf{g}^i + \left[\mathbf{H} \overset{\circ}{,} \mathbf{g}^i\right]_- = 0, \tag{1}$$

where

$$\mathbf{H} = i\hbar\partial_t \boldsymbol{\sigma}_3 \boldsymbol{\Sigma}_3 - \Phi \boldsymbol{\Sigma}_3 + \boldsymbol{\Delta}$$

$$\boldsymbol{\sigma}_k = \begin{pmatrix} \sigma_k & 0 \\ 0 & \sigma_k \end{pmatrix}, \quad \boldsymbol{\Delta} = \begin{pmatrix} \hat{\Delta}_s & -\hat{\Delta}_c \\ \hat{\Delta}_c^\dagger & -\hat{\Delta}_s \end{pmatrix},$$

$$\boldsymbol{\Sigma}_1 = \begin{pmatrix} 0 & \hat{1} \\ \hat{1} & 0 \end{pmatrix}, \boldsymbol{\Sigma}_2 = i\begin{pmatrix} 0 & -\hat{1} \\ \hat{1} & 0 \end{pmatrix}, \boldsymbol{\Sigma}_3 = \begin{pmatrix} \hat{1} & 0 \\ 0 & \hat{1} \end{pmatrix}. \tag{2}$$

Here Φ is the quasi-particle potential, σ_k with $k = \{1,2,3\}$ are the three Pauli matrices. The dot operation $\circ$ denotes internal time integrations as well as matrix multiplication and the brackets $[]_-$ denote commutation. The self-energy term for impurity scattering is neglected throughout this paper. The matrix $\hat{\Delta}_s$ is given by $\hat{\Delta}_{s,11} = \hat{\Delta}_{s,22} = 0$, $\hat{\Delta}_{s,12} = -\hat{\Delta}^*_{s,21} = |\Delta_s|\exp(i\varphi)$, and $\hat{\Delta}_c = \hat{1}|\Delta_c|\exp(i\chi)$.

It is convenient to gauge away both phases φ and χ by applying the unitary transformation

$$\tilde{\mathbf{g}}^i = \mathbf{U}^\dagger(x,t) \circ \mathbf{g}^i \circ \mathbf{U}(x,t') \qquad (3)$$

where $\mathbf{U} = \exp(\frac{i}{2}\boldsymbol{\Sigma}_3\chi + \frac{i}{2}\boldsymbol{\sigma}_3\varphi)$. Disregarding local variations of $\dot{\chi}$, we look for a stationary state solution of the form $\mathbf{g}(x,t-t^{'})$, which can be treated by the Fourier transformation

$$\tilde{\mathbf{g}}^i(x;t-t') = \int \frac{d\epsilon}{2\pi}\tilde{\mathbf{g}}^i(x,\epsilon)e^{-i\epsilon(t-t')/\hbar}. \qquad (4)$$

The stationary-state equation of motion for the Fourier transformed function is

$$iv_F\partial_x\tilde{\mathbf{g}}^i + \Big[\epsilon\boldsymbol{\sigma}_3\boldsymbol{\Sigma}_3 - \tilde{\Phi}\boldsymbol{\Sigma}_3 - ev_F\tilde{A}\boldsymbol{\sigma}_3 + i|\boldsymbol{\Delta}|, \tilde{\mathbf{g}}^i\Big]_- = 0. \qquad (5)$$

with $\tilde{\Phi} = \Phi + \frac{1}{2}\hbar v_F\partial_x\chi + \frac{1}{2}\hbar\dot{\varphi}$, $\tilde{A} = \hbar\dot{\chi}/2ev_F + \hbar\partial_x\varphi/2e$ and $|\boldsymbol{\Delta}| = |\Delta_s|\boldsymbol{\sigma}_2\boldsymbol{\Sigma}_3 - |\Delta_c|\boldsymbol{\Sigma}_2$. From the structure of this equation the well-known duality between the superconductor and CDW phases $v_F\partial_x\chi \Leftrightarrow \dot{\varphi}$ and $\dot{\chi} \Leftrightarrow v_F\partial_x\varphi$ is observed. The gradient of the superconductor phase and the time derivative of the CDW phase correspond to an electrical current, whereas the gradient of the CDW phase and the time derivative of the superconductor phase correspond to an electronic potential.

For the inhomogeneous S/C/S system Eq. (5) has to be supplemented by boundary conditions, which adequately describe the two superconductor interfaces. Here we restrict ourselves to the ideal case where no defects or potential barriers are present at the interaces. In order to derive the boundary conditions it will be convenient to decompose the (4x4) Green functions into four (2x2) blocks as follows

$$\mathbf{g} = \begin{pmatrix} \hat{g} & \hat{f} \\ -\hat{\bar{f}} & -\hat{\bar{g}} \end{pmatrix}. \qquad (6)$$

It can be shown [10] that the diagonal blocks are normalized as usual

$$\hat{g}\circ\hat{g} = \hat{\bar{g}}\circ\hat{\bar{g}} = \hat{1}\delta(t-t'), \qquad (7)$$

and the non-diagonal blocks must satisfy the following relations in the superconducting leads on the left (L) and right (R)

$$\hat{g}_L\circ\hat{f}_L = -\hat{f}_L, \quad \hat{\bar{g}}_L\circ\hat{\bar{f}}_L = \hat{\bar{f}}_L, \qquad (8a)$$

$$\hat{g}_R\circ\hat{f}_R = \hat{f}_R, \quad \hat{\bar{g}}_R\circ\hat{\bar{f}}_R = -\hat{\bar{f}}_R. \qquad (8b)$$

The retarded and advanced Green functions in the superconductors are determined from the stationary-state equation of motion Eq. (5) with $\tilde{\Phi} = |\Delta_c| = 0$. Assuming Δ_s to be constant in the superconductors, it is convenient to apply the Bogoliubov transformation:

$$\boldsymbol{\mathcal{G}} = \boldsymbol{\vartheta}^{-1}\tilde{\mathbf{g}}\boldsymbol{\vartheta},$$

$$\boldsymbol{\vartheta} = \begin{pmatrix} \hat{\vartheta}_+ & 0 \\ 0 & \hat{\vartheta}_- \end{pmatrix}, \quad \hat{\vartheta}_\pm = \begin{pmatrix} u_\pm & -v_\pm \\ v_\pm & -u_\pm \end{pmatrix}, \qquad (9)$$

where $u_\pm$ and $v_\pm$ are the gauge transformed BCS coherence factors given by

$$u_\pm = \sqrt{\frac{1}{2}(1+\frac{\lambda_\pm}{\varepsilon_\pm})} \quad v_\pm = -\sqrt{\frac{1}{2}(1-\frac{\lambda_\pm}{\varepsilon_\pm})},$$

$$\lambda_\pm = \mathrm{sign}(\varepsilon_\pm)\sqrt{\varepsilon_\pm^2 - |\Delta_s|^2}\;\Theta(|\varepsilon_\pm| - |\Delta_s|) + i\sqrt{|\Delta_s|^2 - \varepsilon_\pm^2}\;\Theta(|\Delta_s| - |\varepsilon_\pm|). \qquad (10)$$

Here $\varepsilon_\pm = \epsilon \mp \hbar\dot{\chi}/2$, and Θ is the Heavyside step-function. After substitution of Eq. (9), it follows together with conditions (7) that the retarded Green functions $\hat{\mathcal{G}}$ and $\hat{\bar{\mathcal{G}}}$ at the interfaces are

$$\hat{\mathcal{G}}_L = \begin{pmatrix} 1 & 0 \\ C_L & -1 \end{pmatrix}, \quad \hat{\bar{\mathcal{G}}}_L = \begin{pmatrix} 1 & \bar{C}_L \\ 0 & -1 \end{pmatrix} \qquad (11a)$$

$$\hat{\mathcal{G}}_R = \begin{pmatrix} 1 & C_R \\ 0 & -1 \end{pmatrix}, \quad \hat{\bar{\mathcal{G}}}_R = \begin{pmatrix} 1 & 0 \\ \bar{C}_R & -1 \end{pmatrix} \qquad (11b)$$

where the constants $C_{R,L}$ and $\bar{C}_{R,L}$ denote Andreev scattering amplitudes for the scattering of an quasi-electron into a quasi-hole and vice-versa. The $\hat{\mathcal{F}}$ and $\hat{\bar{\mathcal{F}}}$ blocks are given by

$$\hat{\mathcal{F}}_L = \begin{pmatrix} 0 & 0 \\ D_{L1} & D_{L2} \end{pmatrix}, \quad \hat{\bar{\mathcal{F}}}_L = \begin{pmatrix} \bar{D}_{L1} & \bar{D}_{L2} \\ 0 & 0 \end{pmatrix} \qquad (11c)$$

$$\hat{\mathcal{F}}_R = \begin{pmatrix} D_{R1} & D_{R2} \\ 0 & 0 \end{pmatrix}, \quad \hat{\bar{\mathcal{F}}}_R = \begin{pmatrix} 0 & 0 \\ \bar{D}_{R1} & \bar{D}_{R2} \end{pmatrix}, \qquad (11d)$$

where the diagonal D-constants are 'normal' backscattering amplitudes without spin-flip ('normal' means non-Andreev), and the non-diagonal D-constants are scattering amplitudes with spin-flip, which will turn out to be zero. The boundary conditions (11) state that both quasi-electrons and quasi-holes which move away from the CDW region into the ideal superconducting leads will never be reflected into quasi-particles moving in the opposite direction [9]. The boundary conditions for the advanced Green functions are obtained by the relation $\mathbf{g}^A = -\boldsymbol{\sigma}_3(\mathbf{g}^R)^\dagger\boldsymbol{\sigma}_3$.

In order to determine the yet unknown constants $C's$ & $D's$, we have to solve Eq. (5) in the CDW region and match the boundary conditions. Neglecting the spatial variations of $|\Delta_c|$ near the contacts, the solution to Eq. (5) in the CDW region in terms of Bogoliubov transformed functions is

$$\boldsymbol{\mathcal{G}}(x) = \boldsymbol{\mathcal{M}}^{-1}\boldsymbol{\mathcal{G}}(0)\boldsymbol{\mathcal{M}},$$

$$\boldsymbol{\mathcal{M}} = \boldsymbol{\vartheta}^{-1}\exp(-\frac{i\mathbf{H}x}{\hbar v_F})\boldsymbol{\vartheta}, \qquad (12)$$

where $\mathbf{H} = \epsilon\boldsymbol{\sigma}_3\mathbf{\Sigma}_3 - \frac{1}{2}\hbar\dot{\chi}\boldsymbol{\sigma}_3 - i|\Delta_c|\mathbf{\Sigma}_2$. Evaluating $\boldsymbol{\mathcal{G}}(x)$ at $x = L$ and inserting the boundary conditions (11a)-(11d) we obtain the relation which connects the Green functions at the left and right interface

$$\boldsymbol{\mathcal{L}}\boldsymbol{\mathcal{G}}_R = \boldsymbol{\mathcal{G}}_L\boldsymbol{\mathcal{L}}, \tag{13}$$

in terms of the transfer matrix $\boldsymbol{\mathcal{L}} = \boldsymbol{\mathcal{M}}(L)$:

$$\boldsymbol{\mathcal{L}} = \boldsymbol{\vartheta}^{-1}\exp\left(\frac{i}{2}\theta\boldsymbol{\sigma}_3\right)\left\{\cos\left(\frac{\lambda_c L}{\hbar v_F}\right)\mathbf{1} - i\frac{\tilde{\mathbf{H}}}{\lambda_c}\sin\left(\frac{\lambda_c L}{\hbar v_F}\right)\right\}\boldsymbol{\vartheta},$$

$$\tilde{\mathbf{H}} = \epsilon\boldsymbol{\sigma}_3\mathbf{\Sigma}_3 - i|\Delta_c|\mathbf{\Sigma}_2,$$

$$\begin{aligned}\lambda_c = &\sqrt{\epsilon^2 - |\Delta_c|^2}\,\Theta(|\epsilon| - |\Delta_c|)\\ &+ i\sqrt{|\Delta_c|^2 - \epsilon^2}\,\Theta(|\Delta_c| - |\epsilon|),\end{aligned} \tag{14}$$

with $\theta = \varphi_R - \varphi_L + \dot{\chi}L/v_F$. Evidently, the extra phase factor arises from the line integral of the vector potential $\tilde{A}$ along the junction $\frac{2e}{\hbar}\int_0^L dx\tilde{A} = \dot{\chi}L/v_F$. Since for $|\Delta_c| \neq 0$, the solutions are not invariant under the gauge transformation, it is expected from Eq. (14) that in addition to $\varphi_R - \varphi_L$ the dynamcial phase $\dot{\chi}L/v_F$ due to the motion of the CDW will also enter the expression for the Josephson current. Inserting the boundary conditions, which describe the two superconductors, we can solve for the scattering constants $C's$ and $D's$. Details will be given elsewhere [13]. We next substitute the obtained solutions into the expression for the total current I through the S/C/S junction

$$-I = \frac{ev_F N(0)}{8}\int d\epsilon \mathrm{Tr}\boldsymbol{\sigma}_3\tilde{\mathbf{g}}^K + ev_F N(0)\hbar\dot{\chi}. \tag{15}$$

with $-e$ the electron charge and $N(0) = (\pi\hbar v_F)^{-1}$ the density of states at the Fermi level for one spin direction. The result is

$$I = -\frac{e}{\pi}\dot{\chi} + \frac{e}{h}\mathrm{Im}\int d\epsilon\frac{\sin\eta}{\cos\eta - \cos\zeta}h_0^+. \tag{16}$$

In this expression $h_0^+ = \tanh(\frac{\epsilon - \hbar\dot{\chi}/2}{2k_BT}) + \tanh(\frac{\epsilon + \hbar\dot{\chi}/2}{2k_BT})$, and we have defined the complex angles

$$\eta = \theta + \xi_+ - \xi_-, \quad \xi_\pm = \frac{i}{2}\ln\frac{\varepsilon_\pm - \lambda_\pm}{\varepsilon_\pm + \lambda_\pm}, \tag{17}$$

and

$$\begin{aligned}&\cos\zeta = 1 -\\ &2\left(\cos\frac{\lambda_c L}{\hbar v_F}\sin\frac{\xi_+ + \xi_-}{2} - \frac{\epsilon}{\lambda_c}\sin\frac{\lambda_c L}{\hbar v_F}\cos\frac{\xi_+ + \xi_-}{2}\right)^2.\end{aligned} \tag{18}$$

In the static limit where $\dot{\chi} = 0$, equation (16) corresponds to the Josephson current through a band-insulator with an energy gap $2|\Delta_c|$. Taking the limit $|\Delta_c| \to 0$ reproduces the well-known expressions for an ideal S/N/S junction [10,12]. In the range $\hbar\dot{\chi} < |\Delta_s| < |\Delta_c|$ characteristic oscillations are expected in the Josephson current as a function of the CDW velocity.

Equation (16) expresses the total current through the S/C/S junction as a function of the superconductor phases $\phi_{R,L}$ and the sliding velocity $\dot{\chi}$. In order to obtain a closed set of equations, however, it is necessary to derive an additional relationship between $\dot{\chi}$ and the superconductor phase difference. The additional closing relation can be derived microscopically from the self-consistency relation for the phase of the CDW order parameter

$$\int d\epsilon \mathrm{Tr}\mathbf{\Sigma}_3\tilde{\mathbf{g}}^K = 0, \tag{19}$$

and the Keldysh functions in the reservoirs. The self-consistent solution for the clean junction requires an electrochemical potential difference $\delta\mu = \mu_R - \mu_L$ in the sliding state $\delta\mu = \hbar\dot{\chi}$, as in Ref. [9]. This implies that below the critical Josephson current the CDW will not move. Biased above the critical current the CDW slides, but since the collective CDW motion is dissipative due to the contact reservoirs, a small potential difference is induced on the superconducting leads and the superconductor phase-difference will evolve slowly in time. As a consequence we obtain the relation

$$\delta\mu = \hbar\dot{\varphi}/2 = \hbar\dot{\chi}. \tag{20}$$

The sliding CDW mode thus acts as a shunting resistor parallel to the Josephson channel. The above quasistationary approximation, where the dynamics of the superconductor phase is neglected on the Josephson term, is therefore justified a posteriori [11]. In the short junction limit $L \ll \hbar v_F/|\Delta_s|$, the dynamical phase $\dot{\chi}L/v_F$ can be neglected and if $|\Delta_c| \gg |\Delta_s|$ the Josephson current can be written as $I_c\sin\varphi$, where I_c is the critical current. The time-averaged potential becomes $< V >= R_Q\sqrt{I^2 - I_c^2}$ and it oscillates with the Josephson frequency $\omega_J = 2e < V > /\hbar$, where $R_Q = h/2e^2$ is the (spin included) quantum resistance of a one-dimensional ballistic quantum wire. Note that far above the critical current $I \gg I_c$ the Josephson frequency becomes two times the fundamental frequency of the narrow band noise $\omega_J = 2\omega_{NBN} = 2\pi I/e$.

The assumption of an ideal S/C/S junction is rather restrictive in realistic systems where interface effects and impurities tend to pin the CDW. Although a fully microscopic treatment is beyond present work, one can account for the pinning effects by replacing Eq. (20) by $\delta\mu = \hbar\dot{\varphi}/2 = \hbar\dot{\chi} + \mu_T\sin\chi$. This model corresponds to the single-particle model of CDW's [14], where μ_T represents the threshold value required to overcome the pinning potential.

We conclude by summarizing our results. We have formulated the kinetic equations for a coupled superconductor-CDW system and calculated the current through an ideal superconductor/charge density wave/superconductor junction. In the dc limit the CDW does not move. Biased above the critical current the CDW slides, and the Josephson current oscillates as a function of the CDW velocity. The collective mode acts as a non-linear shunting resistance parallel to the Josephson channel.

This work is part of the research program of the "Stichting voor Fundamenteel Onderzoek der Materie (FOM)", which is financially supported by the "Nederlandse Organisatie voor Wetenschappelijk Onderzoek (NWO)." We are indebted to Yuli Nazarov and Gerrit Bauer for their valuable advise and insights.

[1] B.D. Josephson, Physics Letters **1**, 251 (1962).
[2] I.O. Kulik, Zh. Eksp. Teor. Fiz. **57**, 1745 (1969) [Sov. Phys. JETP **30**, 944 (1970)].
[3] R.Fazio, F.W.J. Hekking, and A.A. Odintsov, Phys. Rev. Lett. **74**, 1843 (1995).
[4] For a review see *Charge Density Waves in Solids*, edited by L.P. Gor'kov and G. Grüner (North-Holland, Amsterdam, 1989).
[5] H.S.J. van der Zant, O.C. Mantel, C. Dekker, J.E. Mooij and C. Traeholt, Appl. Phys. Lett. **68**, 3823 (1996).
[6] A.I. Larkin and O.V. Ovchinikov, Sov. Phys. JETP **41**, 960 (1975) [Zh. Eksp. Teor. Fiz. **68**, 1915 (1975)].
[7] S.A. Artemenko and V. Volkov, Sov. Phys. JETP **53**, 1050 (1980) [Zh. Eksp. Teor. Fiz. **80**, 2018 (1981)].
[8] A.V. Zaitsev, Sov. Phys. JETP **59**, 1015 (1984) [Zh. Eksp. Teor.Fiz. **86**, 1742 (1984)].
[9] B. Rejaei and G.E.W. Bauer, Phys. Rev. B **54**, 8487 (1996).
[10] A.V. Zaitsev, in *Nonequilibrium Superconductivity*, edited by V.L. Ginzburg (Nova Science Publishers, New York, 1988).
[11] K.K. Likharev, in *Dynamics of Josephson Junctions and Circuits* (Gordon an Breach Science Publishers, 1986).
[12] C.W.J. Beenakker, in *Transport Phenomena in Mesoscopic Systems*, edited by H. Fukuyama and T. Ando (Springer-Verlag, Berlin, 1992).
[13] M.I. Visscher and B. Rejaei (unpublished).
[14] G. Grüner, A. Zawadowski, and P.M. Chaikin, Phys. Rev. Lett. **46**, 511 (1981).

FIG. 1. Schematic figure of a charge density wave with length L, sandwiched between two superconductors with phases ϕ_R and ϕ_L. The junction is biased with a current source.

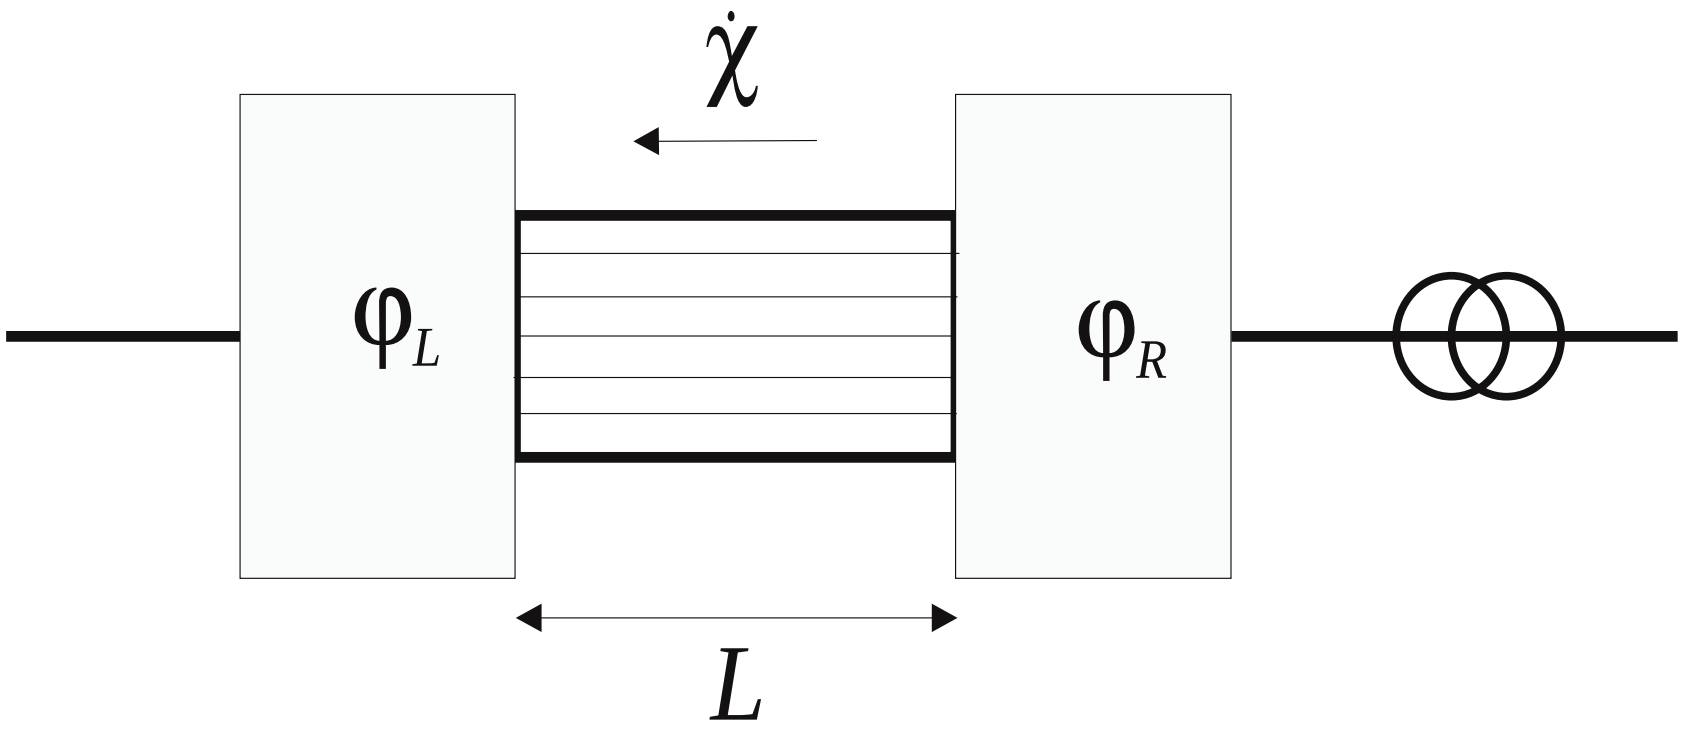

$\dot{\chi}$
φ_L
φ_R
L